


ORIFICE FLANGES AND METERRUNS

Orifice flanges are standard according ASME B16.36, which means ½" NPT flange tapings complete with plugs and jackscrews.

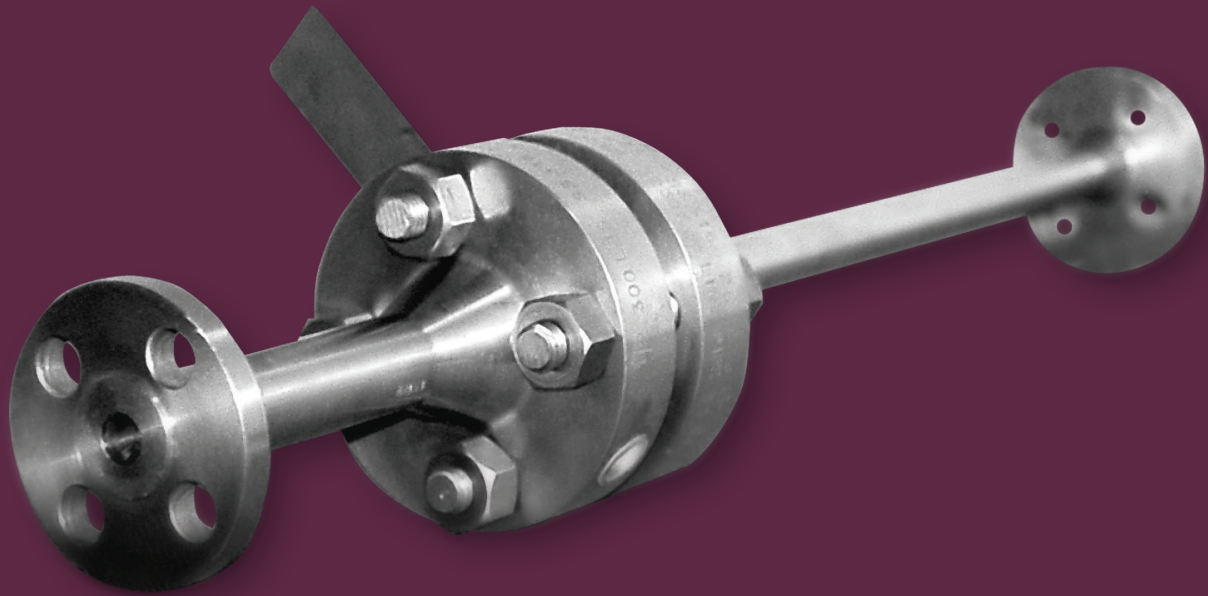

QUALITY CAN BE MEASURED

den holder 

ORIFICE FLANGES AND METERRUNS

Orifice flanges are standard according ASME B16.36, which means 1/2" NPT flange tapplings complete with plugs and jackscrews. In the case of an orifice assembly this can be completed with orifice plate and gaskets. The flanges can optionally be executed with corner or other possible process connections, such as SW or with BW, plain-end or flanged welding nipples. This can be completed with valves, condensate pots and/or differential pressure transmitters.

Orifice Meterruns are fabricated in accordance with ISO 5167 requirements and several construction codes such as ASME

B31.3 or Stoomwezen Rules for Pressure Vessels. Apart from flange tapplings, the orifice flanges in meterruns can also be executed with corner tapplings, radius tapplings or pipe tapplings. The flanges can optionally supplied with dowell pins to ensure correct positioning of pipework up- and downstream of orifice plate.

Both orifice flanges and meterruns can be supplied in any required material complete with material certificates 3.1 or 3.2.

ORDERING DATA

DESIGN CODES » ASME B16.36, ISO 5167, AGA, ANSI, BS, DIN

TYPE OF FLANGE » WN • SO • threaded

CLASS » 150 – 2500 #


FLANGE FACING » RF or RTJ

TYPE OF TAPPINGS » Flange tapplings » Corner tapplings
» Radius tapplings » Pipe tapplings

TAPPING SETS » Single, Double

PROCESS CONNECTIONS » NPT threaded » Flanged
» Socket Weld » Butt Weld

MATERIALS » A105N / A350LF2 / A182-F5, F11, F22, F91 / C21
» A182-F304(L), A182-F316(L)/Ti, A182-F321(L) » A182-F51 / 1.4462 / UNS S32760 (super duplex) » Monel / Hastelloy C22, C276 / Alloy 20 » Titanium » On request

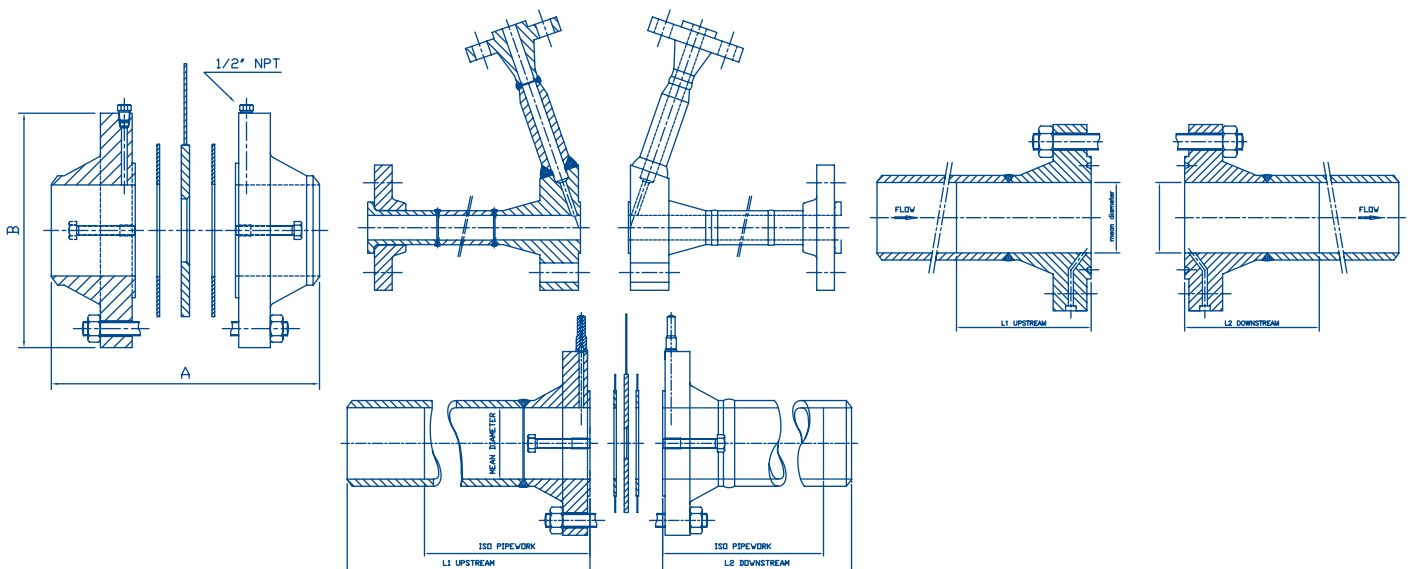

EUROPE

Rivium Boulevard 101
4817 ZJ Breda
The Netherlands

PHONE +31(0)88 11 67 600
Email: info@denholder.com

MIDDLE EAST

P.O. Box 3949
Abu Dhabi
United Arab Emirates

Phone +971 24 493 841
Fax +971 24 493 824
Email: info@denholder.ae